

Anti-Climb Express® Temporary Fencing



Image is for illustrative purposes as we no longer sell concrete feet for temporary fencing



*Thermoplastic foot replaces previous plastic foot filled with concrete.



Anti-Climb Express® Temporary Fencing panels are constructed from galvanised tube frames with welded mesh infill. They are 2.00m high x 3.50m wide, clad with 38mm x 253mm mesh. Standard panels have 38mm uprights with a 25mm top & bottom rail. Heavy duty panels have a 38mm frame throughout. It is easy to create a gate at any point on the perimeter.

Express panels are economical as they can be used time after time. Panels stack easily and can be delivered accompanied by fork lift for easy distribution. They are surprisingly light and easy to handle. It is possible to erect four metres a minute.

Anti-Climb Express® Temporary Fencing Panels

Temporary Fencing	Ref
Anti-Climb Heavy Duty (10x min. delivery qty)	050010 ●
Anti-Climb Standard (10x min. delivery qty)	050008 ●
Pedestrian gate 2.00m x 1.00m wide	050200 ●
1.10m high crowd control barrier	050009 ■
Footings	
Concrete Foot	050151 ●
Thermo Plastic Foot*	050166 ●
Double Metal Foot	050171 ■
Fence Stabiliser	050039 ●
Accessories	
Fence coupler - 2 per panel standard	050035 ●
Gate Hinge	050036 ●
Anti-Lift Device	050200 ●
Barbed Wire Extension	050009 ●

Express panels do not qualify for the Jacksons 25 year service life guarantee as they are a temporary product.

● Stock items ■ Check for availability

Galvanised Tubular Fencing



Our galvanised tubular fencing system works with both chain link and welded mesh cladding. The tubular construction makes it far stronger than old fashioned 'rusty' angle iron or heavy concrete post systems, it also makes it less vulnerable to vandals. Being tubular, it also eradicates the chances of the top rails sagging, which is a common problem with old systems, so it stays looking good for much longer. Extra security can be added by fixing vertical or cranked extensions for barbed wires or tapes on to the top of the system.

On the next pages we show the six systems we offer for tubular fencing for both welded mesh and chain link cladding.

Please ask our sales advisors for help with any technical details you require, call 0800 41 43 43.

Jacksons Fencing is a Secured by Design Licensed Company with products which meet technical standards endorsed by the UK Police Service.



Galvanised Tubular Fencing System

System 1

Tubular fencing system without a top rail, in medium and heavy duty.

Heavy and medium grade tubular posts with straining posts and struts. Intermediate posts are supplied with line wire clips and a post cap (see detail). Straining posts are supplied with struts (for use at ends, corners and changes in direction), stretcher bars and winders. Suitable for domestic installations, dog runs etc.

System 2

Tubular fencing system without a top rail, heavy duty with posts vertically extended for 3 rows of barbed wire.

Heavy grade tubular posts with straining posts and struts. Intermediate posts are supplied with line and barbed wire clips and a post cap (see detail). Straining posts are supplied with struts as required, stretcher bars and winders (see detail). Suitable for industrial fencing with minimum security applications.

System 3

Tubular fencing system with a top rail and heavy duty posts. (Will not suffer deformation when climbed over).

Intermediate posts are supplied with line wire clips and a post cap to locate the top rail (see detail). Straining posts are supplied with stretcher bars and winders, and fittings for the top rail (for use at ends, corners and changes of direction). Suitable for domestic installations where the fence will be tested and the long term look of the fence is important.

- Galvanised tubular fencing system for both chain link and welded mesh cladding
- Tubular construction for extra strength - less vulnerable to vandalism
- Supersedes old fashioned 'rusty' angle iron or heavy concrete post systems
- No sagging with extra strength from the top rail - stays looking good for much longer
- Extra security options - vertical or cranked extensions for barbed wires or tapes

System 4

Tubular fencing system with a top rail & heavy duty posts & vertical extensions for 3 rows of barbed wire.

Intermediate posts are supplied with line wire clips and a post cap to locate the top rail and high tensile barbed wire (see detail). Straining posts are supplied with stretcher bars, winders and fittings for the top rail, as well as winders for the barbed wire (for use at ends, corners and changes of direction). Suitable for quality industrial installations where the fence will be tested and the long term look of the fence is important.

System 5

Tubular fencing system with a top rail, heavy duty posts and cranked intermediate extensions for 3 rows of barbed wire with struts for securing cranked extensions on end and corner posts.

Intermediate posts are supplied with line wire clips (see detail) and a post cap to locate the top rail and high tensile barbed wire. Straining posts are supplied with stretcher bars, winders, and fittings for the top rail, as well as winders for barbed wire (for use at ends, corners and changes of direction). Suitable for quality industrial installations where the fence will be tested and the long term look of the fence is important.

System 6

Tubular fencing system with a top rail, heavy duty posts and 'Y' extensions for 6 rows of barbed wire.


Intermediate posts are supplied with line wire clips (see detail) and a post cap to locate the top rail and high tensile barbed wire. Straining posts are supplied with stretcher bars, winders and fittings for the top rail, as well as winders for barbed wire (for use at ends, corners & changes of direction). Suitable for high security installations, where the fence will be tested & the long term look of the fence is important. In addition to six rows of barbed wire, concertina razor wire can be fixed in the 'Y' to make an almost impenetrable barrier.

Post Setting etc.

Intermediate posts should be set at 3.00m centres, straining posts should be set at all dramatic changes of direction and levels, with a maximum 100m for straight runs or 69m if the fence has no top rail. All straining posts should be set in concrete and intermediate posts if it is a security fence.

Posts should be set at the following depths:

- Fence heights up to 1.40m - 600mm in the ground
- Fence heights from 1.50m to 3.05m - 750mm - 800mm in the ground
- Fence heights over 3.05m - 800mm in the ground

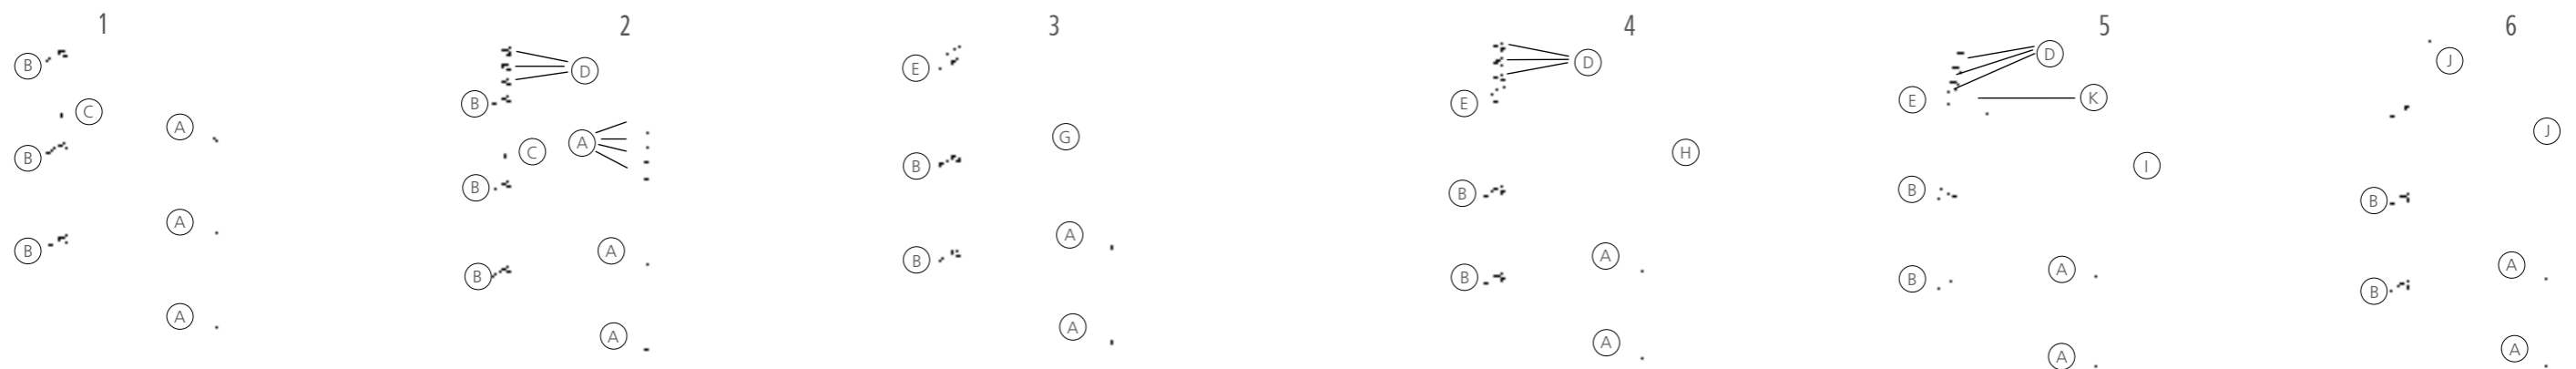

Details on Systems 1 - 6

Drawings A to K below correspond to the circled figures in the diagrams for Tubular Fencing Systems 1 to 6 above.

A - Line wire clip

B - Stretcher bar / ferrule winder assembly

C - Strut connection assembly

D - Barbed wire straining with ferrule winder

E - Top rail and stretcher bar assembly

F - Post cap

G - 'T' cap top rail system

H - Vertical extension

I - Cranked extension

J - 'Y' top end post top rail & stretcher bar assembly

K - struts for securing cranked extensions at ends and corners

Please contact us regarding prices and references.

System 1 Medium

Fence Height	Intermediate posts Ref
0.90m	061509BM
1.20m	061512BM
1.40m	061514BM
1.80m	061518BM

Top Rail

	Ref	Ref
6m with connector	064000BM	064000BM

System 1 Heavy

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref
0.90m	061609BM	062609BM	063609BM
1.20m	061612BM	062612BM	063612BM
1.40m	061614BM	062614BM	063614BM
1.80m	061618BM	062618BM	063618BM
2.00m	061620BM	062620BM	063620BM
2.40m	061624BM	062624BM	063624BM
2.75m	061627BM	062627BM	063627BM
3.05m	061630BM	062630BM	063630BM
3.60m	061636BM	062636BM	063636BM

System 2

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref
1.80m	061718BM	062718BM	063718BM
2.00m	061720BM	062720BM	063720BM
2.40m	061724BM	062724BM	063724BM
2.75m	061727BM	062727BM	063727BM
3.05m	061730BM	062730BM	063730BM
3.60m	061736BM	062736BM	063736BM

System 3

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref
0.90m	061109BM	062109BM	063109BM
1.20m	061112BM	062112BM	063112BM
1.40m	061114BM	062114BM	063114BM
1.80m	061118BM	062118BM	063118BM
2.00m	061120BM	062120BM	063120BM
2.40m	061124BM	062124BM	063124BM
2.75m	061127BM	062127BM	063127BM
3.05m	061130BM	062130BM	063130BM
3.60m	061136BM	062136BM	063136BM



System 4

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref
1.80m	061318BM	062318BM	063318BM
2.00m	061320BM	062320BM	063320BM
2.40m	061324BM	062324BM	063324BM
2.75m	061327BM	062327BM	063327BM
3.05m	061330BM	062330BM	063330BM
3.60m	061336BM	062336BM	063336BM

System 5

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref	2 way posts Ref
1.80m	061218BM	062218BM	063218BM	064218BM
2.00m	061220BM	062220BM	063220BM	064220BM
2.40m	061224BM	062224BM	063224BM	064224BM
2.75m	061227BM	062227BM	063227BM	064227BM
3.05m	061230BM	062230BM	063230BM	064230BM
3.60m	061236BM	062236BM	063236BM	064236BM

System 6

Fence Height	Intermediate posts Ref	End posts Ref	Corner 2 way posts Ref	2 way posts Ref
1.80m	061418BM	062418BM	063418BM	064418BM
2.00m	061420BM	062420BM	063420BM	064420BM
2.40m	061424BM	062424BM	063424BM	064424BM
2.75m	061427BM	062427BM	063427BM	064427BM
3.05m	061430BM	062430BM	063430BM	064430BM
3.60m	061436BM	062436BM	063436BM	064436BM

Key: GALV = Hot Dipped Galvanised. PPC = Polyester Powder Coated.

Chain Link Gates

Chain Link Gates - suitable for domestic & heavy duty fencing using the Galvanised Tubular System. The standard chain link gates are made for 980mm opening and are 50mm shorter than the fence height.



They are right or left hand hanging and clad with galvanised coated chain link, also available in a green finish. The framing is made from 42mm diameter galvanised tube. The gates come ready for hanging, complete with hinge pins, and bolts for attaching to the end strainer.



Single or Double-leaf Gates for Industrial Use

Single or double-leaf gates can be supplied for industrial use to almost any specification and degree of security. Gates can be made to suit various conditions and to hang in line between posts for 90° opening or behind the posts for 180° openings and are manufactured 0.91m wide.

- Galvanised tubular system gates with both chain link and welded mesh cladding.
- Suitable for domestic or heavy duty fencing.
- Galvanised finish with optional polyester powder coating.
- Single or double leaf for industrial use.
- Security options - as with fencing system extensions for barbed wires or tapes.
- Tubular construction for extra strength - less vulnerable to vandals.

Fence Height	Gate Height	Plastic Coated Infill	Galvanised Infill
		Ref	Ref
0.90m	0.86m	309610	309661
1.20m	1.17m	309710	309771
1.40m	1.32m	309810	309881
1.80m	1.78m	309910	309991
2.00m high tennis court gate, made in a frame for easy installation fitted with an integral key lock.			051020BM



Welded mesh cladding



I have been a customer since 2006 - both metal fencing for commercial premises and wooden fences at home. They have never disappointed me. My latest order confirms that Jacksons continue to provide everything one would expect from a confident market leader - quality product, attentive customer service and helpful drivers.

Andrew, August 2018.

Items to Consider

- Single or double leaf.
- Height of gate frame.
- Width of opening.
- Opening inwards or outwards.
- Opening arc 90° or 180°.
- Gate posts (round).
- Chain link infill available in plastic covered or galvanised wire.

Hinge Pack

With bolts for attaching to end strainer posts. Included free of charge with gates. Please specify type required.

Description	Ref
Fittings kit for gates, included free of charge with gates.	307777BM

Chain Link Galvanised - 50mm Mesh

Suggestions for use:-

- The galvanised tubular system on pages 143 - 147 gives greater support and strength to the chain link & prevents deformation of the top.
- 2.5mm Galvanised and 1.7/2.5mm are suitable for general domestic, 2.24/3.15mm for site compounds and tennis courts - 2.75m high.
- Galvanised is best for dogs, 2.5mm for most breeds, but 3mm should be used for the stronger and larger breeds.
- For heavy industrial use 3mm or 3.5mm galvanised or PVC coated, 2.5/3.55mm, 3.0/4mm or 3.5/4.75mm according to the situation.



Roll Height		0.9m	1.2m	1.4m	1.8m	2.0m	2.4m	2.75m	3.05m
Standard No. of Line Wires		2	3	3	3	3	4	5	5
Wire Size	Gauge	Length	Ref	Ref	Ref	Ref	Ref	Ref	Ref
2.5mm	12½g	25m	300100 ●	300200 ●	300300 ●	300400 ●	—	—	—
2.5mm	12½g	12.5m	—	—	—	—	311700 ●	307000 □	305000 □
3.0mm	10½g	25m	300500 ●	300600 ●	300700 ●	—	—	—	—
3.0mm	10½g	12.5m	—	—	—	300800 ●	315300 □	303700 ●	305200 □
3.55mm	9½g	12.5m	305900 □	306100 □	306900 □	315700 □	316100 □	316500 □	316900 □

Note: Separate galvanised line wire on page 128. Chain Link fencing conforms to B.S. 1722 part 1, galvanising conforms to BS EN 10223. Line wire is supplied with each roll. Non stock items 21-35 days delivery. Free fence erection instructions available upon request.

Chain Link Galvanised PVC Coated - 50mm Mesh

Roll Height		0.90m	1.20m	1.40m	1.80m	2.00m	2.40m	2.75m	3.05m
Standard No. of Line Wires		2	3	3	3	3	4	5	5
Wire Size	Length	Ref	Ref	Ref	Ref	Ref	Ref	Ref	Ref
1.7/2.5mm (Green only)	25m	300900 ●	301000 ●	301100 ●	301200 ●	—	—	—	—
1.7/2.5mm (Green only)	10m	303300 ●	303400 ●	303500 □	303600 ●	—	—	—	—
2.24/3.15mm 13.5 /10.5g	25m	301300 ●	301400 ●	301500 ●	301600 ●	—	—	—	—
2.24/3.15mm 13.5 /10.5g	12.5m	—	—	—	—	305500 □	307500 □	305400 □	305700 □
2.5/3.55mm 12 /9.5g	12.5m	302912 ●	303012 ●	303112 □	303212 ●	304500 □	306300 □	305600 ●	306500 □
3.0/4.0mm 10/2/8g.	12.5m	309500 □	310000 □	312100 □	304000 ●	306700 □	304100 ●	307100 □	304200 □
3.55/4.75mm 9.5/6.5g.	12.5m	321900 □	322000 □	322100 □	307900 □	308000 □	308100 □	308200 □	308300 □

● Stock items □ Supplied to order (Cannot be cancelled once ordered).

We reserve the right to alter specification in accordance with our policy of continuous improvement.



Tennis Court Fence

Tennis court fence 2.75m high constructed of tubular posts 60.3mm diameter, with a galvanised top rail and struts of 41mm diameter complete with tubular formed gate. The whole court clad with plastic coated chain link 50mm mesh, 3.15mm overall, with 2.24mm galvanised core wire complete with plastic coated line and tying wires.

- Galvanised tubular system 3 Tennis Court Surrounds with both chain link and welded mesh cladding.
- Galvanised finish with optional polyester powder coating (at extra cost).
- Tubular construction for extra strength - less vulnerable to vandals.
- Comes complete with plastic coated line and tying wires.

Single or Double Court Fencing

Description	Single Court	Double Court
	18m x 36m	34m x 36m
	Qty	Qty
3.5m long galvanised corner posts complete with fittings & struts.	4	4
3.5m long galvanised intermediate posts.	32	44
Top Rail 6m Galvanised top rail with connectors.	18	24
Tennis Court Gates and frame Galvanised 1m wide x 2m high complete with Galvanised chain link infill and key lock.	1	2
Chain Link 12.5m rolls Green PVC coated with galvanised core wire, 2.75m high, 3.15/2.24mm gauge.	9	12
Tying wire 1kg. coils 2mm PVC coated.	2	2

For prices on tennis court kits see our separate price list, or call us for a quote on any variations to the court sizes above.

● Stock items □ Supplied to order (Cannot be cancelled once ordered).

Heavy Welded Mesh - Galvanised Finish

Height	Mesh	Wire Size	Length of Roll	Ref
0.90m	50x50mm	2.5mm	25m	520000 ●
0.90m	50x50mm	3.0mm	25m	520100 ●
1.20m	50x50mm	2.5mm	25m	520400 ●
1.20m	50x50mm	3.0mm	25m	520500 ●
1.80m	50x50mm	2.5mm	25m	521500 ●
1.80m	50x50mm	3.0mm	25m	521600 ●
1.80m	75x25mm	3.0mm	25m	521700 □
2.40m	50x50mm	2.5mm	12.5m	522100 ●
2.40m	50x50mm	3.0mm	12.5m	522200 ●
2.67m	75x25mm	3.0mm	12.5m	522999 □
2.40m	75x25mm	3.0mm	12.5m	522300 □

Heavy Welded Mesh - Green PVC Finish

Height	Mesh	Wire Size	Length of Roll	Ref
0.90m	50x50mm	3.1/2.5mm	25m	520300 ●
1.20m	50x50mm	3.1/2.5mm	25m	520800 ●
1.80m	50x50mm	3.1/2.5mm	25m	521900 □
0.90m	50x50mm	3/3.5mm	25m	522750 □
1.20m	50x50mm	3/3.5mm	25m	522760 □
1.80m	50x50mm	3/3.5mm	25m	522780 □
2.40m	50x50mm	3/3.5mm	25m	522800 □

Heavy Welded Mesh - Black PVC Finish

Height	Mesh	Wire Size	Length of Roll	Ref
0.90m	50x50mm	3/3.5mm	25m	522759 □
1.20m	50x50mm	3/3.5mm	25m	522769 □
1.80m	50x50mm	3/3.5mm	25m	522789 □
2.40m	50x50mm	3/3.5mm	25m	522809 □

Our tubular system works equally well with welded mesh as an alternative cladding. Galvanised to BS EN 10223. For Line wire see page 128.

Light Welded Mesh



Galvanised rolls of 30m or 6m welded mesh are ideal for pet cages, puppy runs and aviaries. Other uses include greenhouse staging for making trays baskets and seedling guards. There are literally hundreds of other uses to which people put this adaptable mesh. Height is 900mm.

Mesh (mm)	Gauge	6m Roll Ref	30m Roll Ref
13 x 13	19	364000 ●	362100 ●
13 x 25	19	364100 ●	362700 ●
25 x 25	16	364400 ●	362400 ●