


Jaksun® Solar Fence Panel

Jacksons Fencing

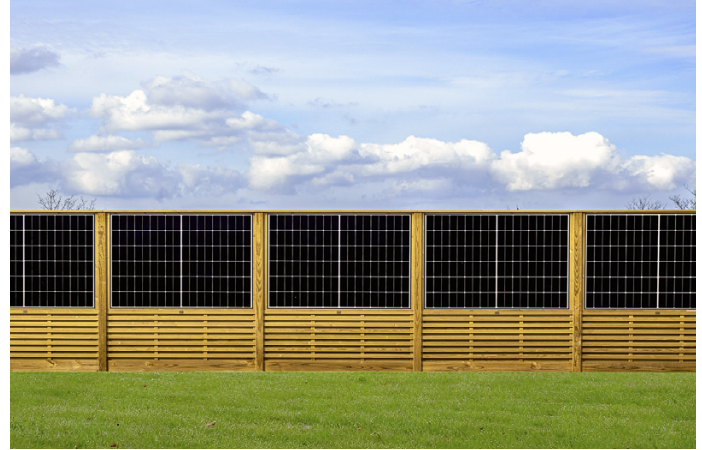

The Jaksun® Solar Fence Panel revolutionises the capabilities of a garden fence. Combine it with any of our 0.60m* high fence panels to create a garden fence with good aesthetics and the functionality of energy production, through the implementation of conventional solar panels.

- All timber used throughout is superior quality Jakcure® treated softwood guaranteed for 25 years.
- 25 year product warranty and linear solar output from solar panel manufacturer.
- All fixings are stainless steel.
- Adapted slotted or heavy duty Jakposts are required for installation.
- We recommend any 0.60m fence panel underneath the solar fence panel (other panel height combinations are available but you will generally need planning permission for anything over two metres).
- Gravel boards are required where panels are in contact with the ground.

Specification

Panel Height: 1170mm
 Panel Width: 1830mm
 Panel Thickness: 50mm

Timber fence panel underneath the panel is interchangeable and sold separately. We recommend a 0.60m panel is installed underneath.

Technical Data:

Electrical Peak power - 415W
 Vmpp - 44.3V
 Voc - 52.6V
 Imp - 10.05A
 Isc - 10.71A

Capping is essential and this will help conceal the cables that are hidden within the posts. The capping also needs to be modified slightly to include a channel for the cabling.

Gravel boards need to be used when panels are in contact with the ground as part of the 25 year Jakcure® guarantee. More details can be found on our Jakcure T&Cs page.



View our website for Q40 specification documents, CAD drawings and products available to buy online.

A fully made to measure service is available. All Jacksons Fencing systems and gates may be designed and manufactured to suit site conditions.

Note that components can temporarily swell up to 6% in width after our Jakcure® process temporarily affecting the overall product dimensions slightly.