


Vertical Tongue & Groove A30E | LPS 1673

Jacksons Fencing

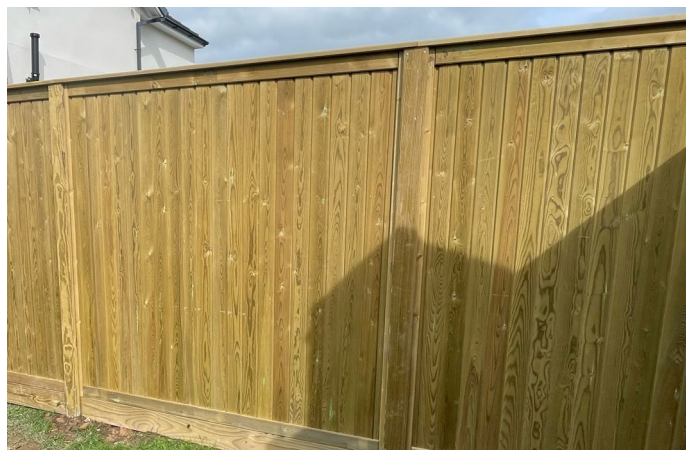

Offering the timeless appearance of our popular Vertical Tongue and Groove Effect panels, these increased security versions are certified to LPS 1673. Built with a strong mortice and tenon jointed frame and featuring Tongue and Groove Effect infill boards, these panels deliver an attractive boundary solution without compromising on security.

- All timber used throughout is superior quality Jakcure® treated softwood guaranteed for 25 years
- No staining, painting, or additional treatment required for its lifetime
- All fixings are stainless steel
- Morticed and tenoned frame
- Designed for use with slotted Jakposts®*
- Gravel boards are required where panels are in contact with the ground**
- Panels can be stepped to a maximum 100mm decline per panel
- Secured by Design Police Preferred Specification

Specification

Minimum fence height: 1.8m

Maximum fence height: 2.24m

Standard panel height: 1.83m

Panel width: 1.83m

Thickness: 51mm

Framing: Sides: 45 x 51mm section planed Top/Bottom: 70 x 51mm section planed

Coverage width of a tongue and groove board is approx. 80mm.

About LPS 1673

LPS 1673 is an LPCB certification that tests a product's ability to resist violent forced entry attacks using physical force and handheld tools. Products are independently tested to verify their security performance.

A30 indicates that the product has been tested to resist an opportunist attack using bodily physical force and easily concealed tools for 30 seconds. The additional E classification confirms that the product has also undergone assessment against attacks involving a fire extinguisher.

If you need to reduce the width of a panel on site, a cut down kit is available. Always use end grain treatment supplied by Jacksons on any cut timber.

*Note: Any corners must be formed using two end posts installed back to back to achieve the required angle, in order to achieve the A30E rating.

**Note: No gap may be present under the fence. Gravel board may be dug in up to 100mm, as long as 1.8m fence height is reached.

Gates

Brook gates are both robust and versatile and will give ultimate privacy to any property. Manufactured from Jakcure® treated softwood, right and left hand hanging (when viewed from the outside) as standard, they are designed to visually match our Tongue and Groove Vertical panels. Please note these gates are not rated to LPS 1673.

Accessories

Various topping options are available, including capping, trellis, post caps, topper panels, Rota-Spike®, Cobra® Spike, and Viper® Spike. These can be added to enhance the appearance of the fence and provide an additional deterrent to climbing.

View our website for Q40 specification documents, CAD drawings and products available to buy online.

A fully made to measure service is available. All Jacksons Fencing systems and gates may be designed and manufactured to suit site conditions.

Components may swell by up to 6% in width following the Jakcure® process, which may temporarily affect overall product dimensions.