

Jacksons Fencing Specification Sheet

Fencing Stakes and Posts

This is a versatile and hard wearing general purpose fencing suitable for all sorts of agricultural situations. With Jakcured stakes and galvanized wire it's long lasting too.

- All timber used throughout is superior quality Jakcured softwood guaranteed for 25 years
- Versatile and sturdy general purpose fencing
- Machine rounded with chamfered tops

Specification

Struts

Machine rounded. Minimum diameter of 60mm diameter jakcured: 1.8m long

Stakes

Softwood mixed cleft and round 75-100mm across or through the butts, peeled, pointed.

Length: 1.65m and 1.8m

Machine Rounded Jakcured Fencing Stakes


Pointed, with chamfered tops. 75mm diameter: 1.5m, 1.65m and 1.8m long and 90mm diameter: 1.65m and 1.8m long

Anchor Stakes

Half round with a minimum of 75mm face, peeled to act as a trust plate for the struts: 750-900mm

Straining and Corner Posts

Round and peeled. Diameter measurement is approximately through the butt: 2.3m long x dia. 150mm and 2.7m long x dia. 125mm. Straining Posts and struts should be installed at a maximum of every 50m and at all changes of direction and significant changes of level. Intermediate posts for mild steel fencing at 3.5m centres





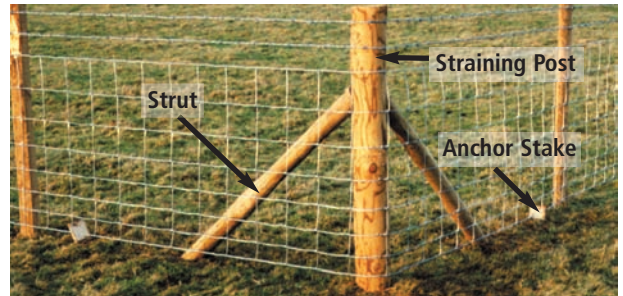


Wire Fencing

- Galvanized wire field fences that are strong, durable and economical
- Wire fencing types 1-4 are coated with Galfan, highly corrosion resistant zinc and aluminium alloy - Laboratory tests have shown these to last twice as long as ordinary galvanized wires
- Supplied in 50m or 100m rolls for high tensile

Specification

- | | | | | |
|---|---|--|---|--|
| <p>1. Cattle or Stock Fence 1.15m (Galfan coated)
Available in medium weight.
Eight line wires
uprights 300mm apart
C8/11/30 (50m rolls)
Top and bottom gauge 3.0mm
Intermediate gauge 2.5mm</p> | <p>2. Pig Fence 800mm (Galfan coated)
also lamb proof
Eight line wires
uprights 150mm apart
Medium C8/80/15 (50m rolls)
Top and bottom gauge 3.0mm
Intermediate gauge 2.5mm
High Tensile* 8/80/15
all wires 2.5mm (100m rolls)</p> | <p>3. Sheep Fence 900mm (Galfan coated)
Six line wires
uprights 300mm apart
Heavy B6/90/30 (50m rolls),
4.0mm, 3mm
Medium C6/90/30 (50m rolls)
3.0mm, 2.5mm</p> | <p>4. Forest Fence 1.0m (Galfan coated)
Seven line wires
uprights 150mm apart
Medium C7/10/15 (50m rolls)
3.0mm, 2.5mm</p> | <p>5. Jacksons galvanized Deer Fence
Conforms to B.S.S.
Deer Fence 1.9m
High tensile (100m rolls)
Vertical wires 150mm apart for perimeter fencing.
High tensile* 13/190/15,
2.5mm, 2.5mm</p> |
|---|---|--|---|--|

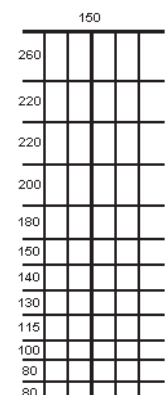

* High tensile fence allows the posts to be further apart





Wire Fencing and Netting

Wire netting galvanized to B.S.E.N 10223

Suggestions for use:

- 13mm: protecting fruit from small birds; keeping out rats
- 25mm: plastering and floor screeding; chicken runs
- 31mm: protection against the smallest rabbits
- 50mm: poultry; general purpose



Mesh	Wire Gauge	Height in millimetres				
		600	900	1050	1200	1800
50 Metre Roll						
25mm	20		✓		✓	✓
31mm	19	✓		✓	✓	
	18			✓	✓	
50mm	19	✓	✓		✓	✓
25 Metre Roll						
13mm	22	✓	✓			
25mm	20	✓	✓		✓	
50mm	19	✓	✓		✓	

Plain Wire

Mild steel galvanized

High Tensile: 3.15mm (10g) 410m, 2.5mm (12.5g) 651m

Size - 25kg coils	Approx length	Size - 5kg coils	Approx length
5.00mm (6g)	162m	3.15mm (10g)	82m
4.00mm (8g)	254m	2.50mm (12g)	130m
3.15mm (10g)	410m	2.00mm (14g)	203m
2.5mm (12g)	651m		
2.0mm (14g)	1017m		
1.6mm (16g)	1590m		



Actual Size



5.00mm



3.15mm




2.0mm



4.00mm



2.5mm



1.6mm

Barbed Wire



Best Jacksons galvanized double strand barbed wire available in 200m with barbs at 100mm centres.

Length	Gauge
200m	2.5mm
200m high tensile	1.6mm

Register on the website to gain access to Q40 specification documents and CAD drawings.

A fully made to measure service is available. All Jacksons fencing systems and gates maybe designed and manufactured to suit site conditions.